

**Durable 100% Cast Iron Frame :** Heavy duty cast iron frame is a rugged design. Our legendary reciprocating compressor offers years of reliable service.


**Superior Quality Construction :** "V" cylinder design allows 360° cooling and longer pump life. Stainless Steel multifinger valves are durable and easy to maintain. Splash lubrication design is simple and totally reliable. It also replaces expensive oil pumps which can fail, leaving the pump without lubrication.

**Simple Maintenance :** Both cylinder are easily removed for repairs. The front end covers can be quickly removed for easy access to internal working parts.

## Single and Two Stage Dry Vacuum Pump



V285

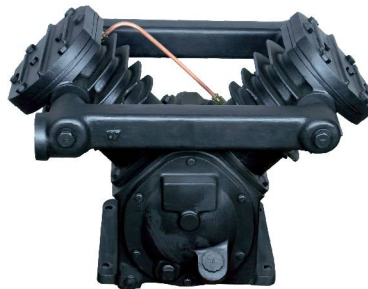

V305



V65

Single and Two Stage Dry Vacuum Pumps					
Model	Motor hp	No. of Cylinders	Piston Displacement cfm	Vacuum (Hg) Pressure	
				Inches	mm
V285	1.5	2	21.60	29.00	736.6
V285T	1.5	2	10.80	29.60	751.8
V294	2.0	2	34.60	29.00	736.6
V294T	2.0	2	17.30	29.65	753.1
V305	5.0	2	60.00	29.00	736.6
V305T	5.0	2	30.00	29.70	754.4
V57	7.5	2	110.00	29.00	736.8
V57T	7.5	2	55.00	29.65	753.1
V65	10.0	3	149.60	29.20	741.7
V65T	10.0	3	99.00	29.65	753.1

These dry Type Vacuum Pump ideally designed for Printing, Plastics, Material Handling, Food Processing Packing, health care and many other Industries.

These Pumps achieve vacuum upto 737 mm (29.0 Hg) for single stage and upto 754.4 mm (29.7 Hg) for two stage configuration, at sea level.